dubbll HP



INTRODUCING dubbll HP

dubbll the warranty! dubbll the value!


PARTS & LABOUR 5 YEARS

COMPRESSOR 7 YEARS

Advanced Monoblock Heat Pump Solutions For Residential & Commercial Applications

PRODUCT OVERVIEW & TECHNICAL DETAILS

MODEL	UNIT	DDHPA-10X-00E & DDHPA-12Y-20E
Type		DC Inverter, Heat Pump
Voltage	V	115/1/60HZ& 230/1/60Hz
Cooling Capacity Range	Btu/h	3,000-12,000
Nominal Cooling Capacity	Btu/h	10,000
Cooling input Power (Nominal)	W	1080 (115V) / 1020 (208V)
Cooling input Power (Max)	W	1500
Cooling Operating Range (outdoor)	°F/°C	32°F/0°C~113°F/45°C
Combined Energy Efficiency Ratio	EER	12.26
Seasonal Energy Efficiency Ratio	SEER2	16
Energy Efficiency Ratio	EER2	9.26 (115V) / 9.8 (208V)
Heating Seasonal Performance Factor	HSPF2	7.5
Moisture Removal	Pts/h	2.5
Heating Capacity Range (47°F/8.3°C)	Btu/h	3,000-12,000
Nominal Heating Capacty (47°F/8.3°C)	Btu/h	9,000
Heating input Power (Nominal) (47°F/8.3°	W	930 (115V) / 850 (208V)
Heating input Power (max)(47°F/8.3°C)	W	1450
Heating Operating range	°F/°C	5OF/-15°C~75OF/24°C
Efficency (47°F/8.3°C)	COP2	2.84 (115V) / 3.1 (208V)
Heating Capacity Range (17°F/-8.3°C)	Btu/h	Nominal 6,500Btu/h
Heating input Power (17°F/-8.3°C)	W	350-1100
Heating Efficency (17°F/-8.3°C)	COP2	2.2
Heating Capacity Range (5°F/-15°C)	Btu/h	Nominal 5,000Btu/h
Heating input Power (5°F/-15°C)	W	350-1100
Heating Efficency (5°F/-15°C)	COP2	1.60
Electric Heating (Only on 220V)	W	1000
Defrost Method		Reverse Cycle
Indoor Blower Motor	Type	DC Motor
Indoor Airflow	CFM	305 for Cooling / 320 for Heating
Indoor Airflow Speeds	Speeds	Low/Med/High
Filter	MERV	1
Outdoor Blower Motor	Type	DC Motor
Outdoor Airflow	CFM	350
Intake opening size	in	8
Exhaust Opening size	in	8
Outdoor Airlow Speeds	Speeds	Variable
Indoor Sound Rating	dB(A)	32-46
Sound Transmission Class	STC	37
Outdoor/Indoor Transmission Class	OITC	28
Compressor Type		Rotary DC Inverter
Refrigerant Type		R-32
Refrigerant Factory Charge	Oz.	19.4
Drain Pan Heater		Factory Installed self-contained
Oil Type		VG74
Oil Amount	Oz.	8.12
Power Supply		LCDI Power Cord
Input Power (Standby)	W	1
MCA	A	14/115V, 15A/230V(1KW), 22A/230V(1KW)
Recommended Breaker size	A	15/115V, 20A/230V(1KW), 25A/230V(2KW)
MOCP	A	20/115V, 23A/230V(1KW),27A/230V(2KW)
Wi-Fi		Yes
ADA Compliant		Yes
Dry Contact		Yes
Power Outage Restart		Auto-on Based on last setting
Modes		Cool, Heat, Dry, Fan Only, Silent
Timers		24 hr
Drain line size	in	4/5 (20mm)
Unit Dimentions	in	39.4"Wx23.1"Hx8.07"D
Pakaging Dimentions	in	44.1"Wx26.19"Hx13.19"D
Unit Weight	lbs	93.5
Gross Weight	lbs	106.7
Cabinet Material		Metal
Cabinet Color		White
Finish		Matt
Saftey Certification		ETL Certified
Energy effcency test lab		Intertek
Saftey Certification	ETL	UL60335-2-40
Efficency Certification	AHRI	AHRI 210/240

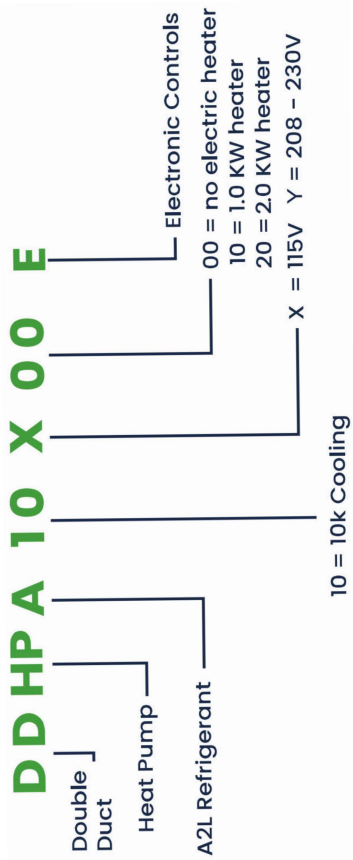

HP

HP

dubbll

Smart Comfort, Simplified



- LED Status Display
- Full DC Inverter Technology
- 1KW and 2KW Electric Heat
- EXV for Accurate Control
- Compliant to ETL and AHRI Std.
- Anti Frozen Condensate Drainage
- Through-the-wall install, 2x8" holes
- Variable-Speed Fans
- R32 Eco Friendly Refrigerant

Industry-Leading Warranty Coverage

Simply stated... dubbll delivers: Comfort and Value with industry-leading warranty coverage!

PARTS & LABOUR 5 YEARS

COMPRESSOR 7 YEARS

KEY HIGHLIGHTS:

Free App Download

Option for a Third-Party 24V Wired Thermostat

Electric Heat, Cooling & Heating Symbols on Features Page

INVERTER



R32

345 Renfrew Drive. #201, Markham, ON L3R 9S9

www.dubbll.com info@dubbll.com +1(416)266-5378